


Indoor / Outdoor Distribution Box IP65 Rated Supports up to 8 Fibres

Open view




Closed view

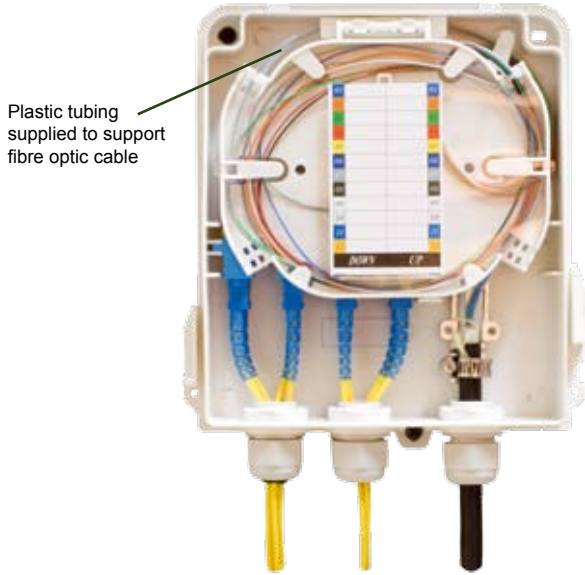


Supports UP TO **8** Fibres

Fibre cable and patchcords available separately

Accessories also included

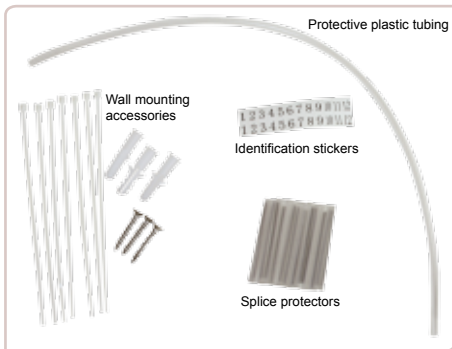

Fibre identification chart

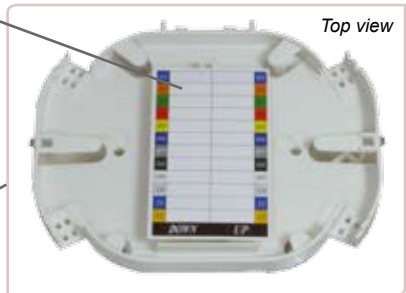

Integrated splitter holder

Detachable splice tray


Fibre adapter holding units

Detachable fibre management hooks

Push to hold lid in place



Cable mounting bracket



Rubber seal

Removable lid



Patch Cord entry points

Cable entry points

Indoor / Outdoor Distribution Box IP65 Rated Supports up to 8 Fibres

This IP65 distribution box offers the ability to terminate 8 fibres housed in a robust ABS enclosure for indoor and outdoor applications.

With the ability to use SC Simplex and LC Duplex adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the interchangeable adaptors, the enclosure also offers up to 8 exit points for patching cables and 1 standard cable entry point for loose tube, tight buffer, pre-terminated and steel tape armoured cable.

Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front cover allowing for quick and easy installation.

Features/Benefits

- > **Up to 8 fibres**
- > **Removable splice tray for easy installation**
- > **Multiple adaptor options available**
- > **8 adaptor positions**
- > **IP 65**
- > **Accepts loose tube, distribution and pre-terminated cables**
- > **Integrated bend radius protection**
- > **Sealing glands for up to 8 exiting cables + 1 incoming cable**
- > **Removable cover for ease of installation**
- > **ROHS, REACH & SvHC compliant**
- > **Supplied with 12 heatshrink splice protectors**
- > **Supplied with transit tubing**
- > **Supplied with wall fixings and tie wraps**

Applications

- > **Data centres, premise installations, telecommunication networks**
- > **Ethernet, Fibre Channel, ATM, LAN, MAN and WAN**
- > **Data communication and telecommunication networks**
- > **Indoor/outdoor applications**

Ordering Information

DESCRIPTION	PART NO.
IP65 Indoor/Outdoor Distribution Box	W23XXX00

Technical Specification

PRODUCT SPECIFICATION	
Height	210mm
Width	175mm
Depth	50mm
Net weight	0.44kg
Packed weight	0.52kg
Packaged dimensions	215mm x 182mm x 51mm
IP rating	IP65
Suitable for adapter type	SC Simplex LC Duplex
Number of fibres	8
Number of ports	8
Cable entry 20mm	1
Cable exit 20mm	2
Material	ABS
Colour	White
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC