


Indoor / Outdoor Lockable Distribution Box IP65 Rated Supports up to 4 Fibres

V.3.0

Open view

Closed view

Plastic tubing supplied to support fibre optic cable

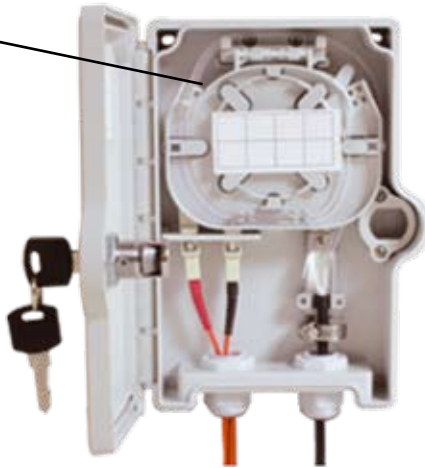


Supports UP TO **4** Fibres




Fibre optic warning sign

Fibre cable and patchcords available separately

Accessories also included

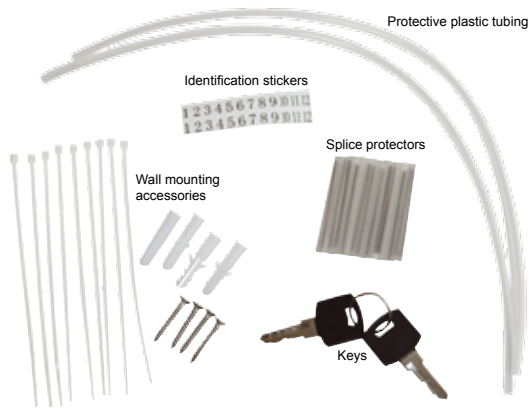

Top view

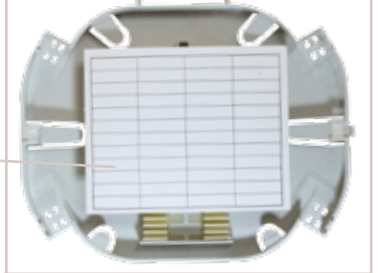

Fibre identification chart

Detachable splice tray

Integrated splitter holder

Lockable



Detachable fibre management hooks

Fibre adapter holding units

Cable mounting bracket



Rubber seal

Removable door



Patch cord exit point

Cable entry point

Indoor / Outdoor Lockable Distribution Box IP65 Rated Supports up to 4 Fibres

Description

This Lockable IP65 distribution box offers the ability to terminate 4 fibres housed in a strong robust ABS enclosure for indoor and outdoor applications.

With the ability to use SC Simplex and LC Duplex adaptor types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In addition to the interchangeable adaptors the enclosure also offers up to 4 exit points for patching cables and 1 standard cable entry point for loose tube, tight buffer, pre-terminated and steel tape armoured cable.

Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front door allowing for quick and easy installation.

Features/Benefits

- > **Up to 4 fibres**
- > **Removable splice tray for easy installation**
- > **Multiple adapter options available**
- > **2 adapter positions**
- > **IP 65**
- > **Accepts loose tube, distribution and pre terminated cables**
- > **Integrated bend radius protection**
- > **Sealing glands for up to 4 exiting cables + 1 incoming cable**
- > **Lockable door**
- > **Removable door for ease of installation**
- > **ROHS, REACH & SvHC compliant**
- > **Supplied with 4 heatshrink splice protectors**
- > **Supplied with transit tubing**
- > **Supplied with wall fixings and tie wraps**

Applications

- > **Data centres, premise installations, telecommunication networks**
- > **Ethernet, Fibre Channel, ATM, LAN, MAN and WAN**
- > **Data communication and telecommunication networks**
- > **Indoor applications**

Ordering Information

DESCRIPTION	PART NO.
Lockable IP65 Indoor/Outdoor Distribution Box	W25XXX00/Z

Technical Specification

PRODUCT SPECIFICATION	
Height	210mm
Width	156mm
Depth	48mm
Net weight	0.51kg
Packed weight	0.59kg
Packaged dimensions	215(H) x 157(W) x 60(D) mm
IP rating	IP65
Suitable for adapter type	SC Simplex LC Duplex
Number of fibres	4
Number of ports	2
Cable entry 20mm	1
Cable exit 20mm	1
Material	ABS
Colour	White
Operating temperature	-40°C to +50°C
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC