

50/125 (OM2) Optical Fibre Pigtails

Optronics multimode pigtailed are used to connect high speed networks like Gigabit Ethernet, Fast Ethernet and Ethernet. The multimode pigtail buffer conforms to IEC, EIA TIA and Telecordia standards. The multimode pigtailed are terminated with standard Optronics connector which gives optimum optical performance.

Features / Benefits

- > SC, LC, ST, FC connectors
- > Low smoke zero halogen (LSZH) buffer
- > 900µm tight buffer or easy strip
- > OM2 pigtail is available in standard white colour
- > Multimode fibre conforms to ITU-G651, TIA/EIA 492AAAA
- > Different connector performance range for specific application
- > Available in standard 12 colours as per IEC 60304
- > Available in standard and blister packing

Applications

- > Networks including Ethernet, Fast Ethernet and GBE
- > Internal inter-connect
- > Ideal for a wide range of telecom, datacom and process control applications where ruggedisation is required
- > Suitable for repeated handling in patch panels and racks



Connector Specification

OPTICAL PERFORMANCE	MULTIMODE	CONFORMANCE
IL Max/Master (Acceptance)	0.30 dB	IEC 61300-3-4
Ave/Master*	0.15 dB	IEC 61300-3-4
Ave/Random*	0.20 dB	IEC 61300-3-34


Buffer Specification

CHARACTERISTICS	UNITS	SIMPLEX
Crush	N/100mm	500
Operating Temperature	°C	-20 to 60
Nominal buffer Diameter	µm	900+50
Max Tensile Load	N	6

Fibre Specification

CHARACTERISTICS	
Attenuation (dB) / km	Please refer to Fibre Comparison Chart
Bandwidth OFL (MHz x km)	
Numerical Aperture (NA)	

Part Number Generator

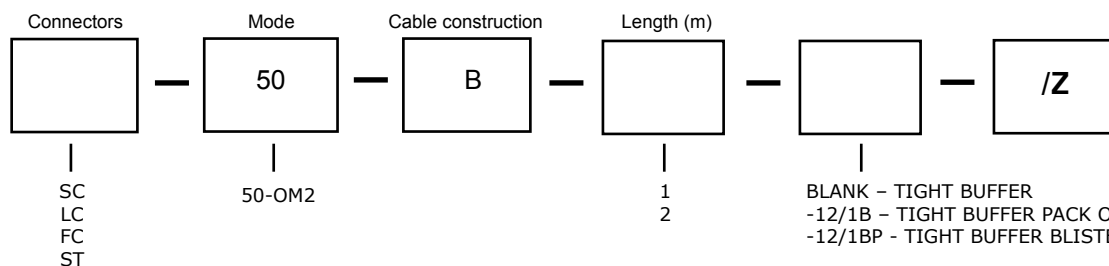

- BLANK - TIGHT BUFFER
- 12/1B - TIGHT BUFFER PACK OF 12
- 12/1BP - TIGHT BUFFER BLISTER PACK OF 12
- EASY - EASY STRIP
- E-12/1B - EASY STRIP PACK OF 12
- E-12/1BP - EASY STRIP BLISTER PACK OF 12

