

### ST Optical Fibre Adaptors

Optronics ST adaptors have high precision alignment sleeves for reliability and better reconnectability. ST adaptors come with a ceramic sleeve for the singlemode and phosphor bronze sleeve for the multimode. The housing is available in double D footprint type.

#### Features


- > Complies with IEC 61754-2
- > Low insertion loss and high reconnectability capability
- > RoHS, REACH SvHC compliant
- > Available in simplex or duplex

#### Applications

- > Data processing networks
- > Premises distribution

#### Technical Specification

OPTICAL PERFORMANCE	CERAMIC	PHOSPHOR BRONZE	CONFORMANCE
Insertion Loss (Typ)	0.1 dB	0.15 dB	IEC 61300-3-4
Mating Durability	500		IEC 61300-2-2
Receptacle Retention force	1N - 2.5N		IEC 61754-20
Operating Temperature	-25 to +70°C, 12 cycles		IEC 61300-2-22

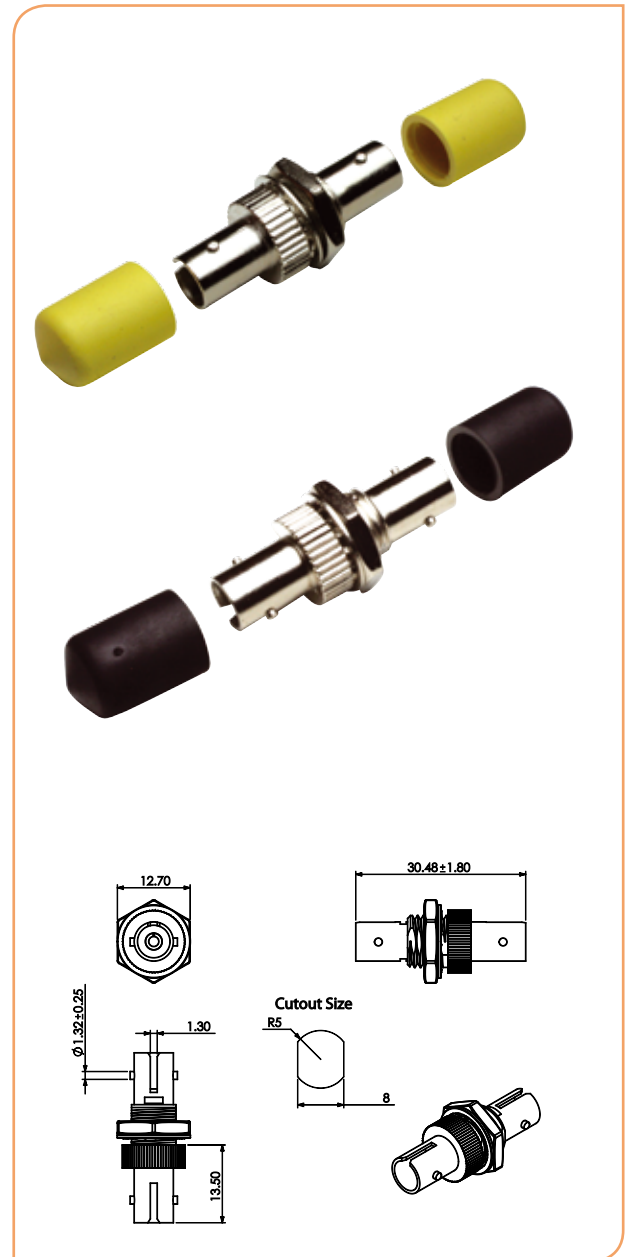

#### Ordering Information

MODE	TYPE		PART NO.
SM	PC	Simplex	<b>STUZR02/Z</b>
MM	PC	Simplex	<b>STUPHBR/Z</b>
SM	PC	Duplex	<b>STUDZR02METAL/Z</b>
MM	PC	Duplex	<b>STUPHBRBEIGE/Z</b>